Motion detector - Professional Line

IS 3360 MX Highbay

DALI-2 APC - surface, sq.
EAN 4007841 010577
Article number 010577



infrared sensor 360°

18 m

IP54

2 - 1000 lux

5 sec - 15 min

manual override

ideal 4 - 14 m

Teach

Teach mode

5 years

manufacturer's warranty steinel.de/garantie

CE

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version.

Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Remote control, Potentiometers, Smart Remote
With remote control	No
Version	DALI-2 APC - surface, sq.
PU1, EAN	4007841010577
Type	Motion detectors
Application, place	Indoors
Application, room	high-bay warehouse, sports hall, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Package content	1
Installation	Surface wiring, Ceiling

Mounting height max.	14,00 m
Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 14 m (154 m^2)
Reach, tangential	Ø 36 m (1018 m^2)
Switching zones	1416 switching zones
Cover material	shrouds
Functions	Normal / test mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.

Motion detector - Professional Line

IS 3360 MX Highbay

DALI-2 APC - surface, sq.
EAN 4007841 010577
Article number 010577

Technical specifications

IP-rating	IP54	Basic light level function	Yes
Ambient temperature	from -20 up to 50 °C	Basic light level function time	1-30 min, all night
Material	Plastic	Main light adjustable	50 - 100 %
Mains power supply	220 – 240 V / 50 – 60 Hz	Twilight setting TEACH	Yes
Control output, Dali	Broadcast 1x30 electronic ballasts	Constant-lighting control	Yes
Technology, sensors	passive infrared, Mixed light metering	Interconnection	Yes
Voltage range (min)	220 V	Type of interconnection	Master/slave
Voltage range (max)	240 V	Interconnection via	Cable
Mounting height	4,00 – 14,00 m	Product category	Motion detector

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8
EAN 4007841 592806	User remote control RC5
EAN 4007841 056711	Black cover for IR-sensors surface, sq.

Optional system components


EAN 4007841 082109	Relais REL5A-DALI-2

Motion detector - Professional Line

IS 3360 MX Highbay


DALI-2 APC - surface, sq.
EAN 4007841 010577
Article number 010577

Detection Zone

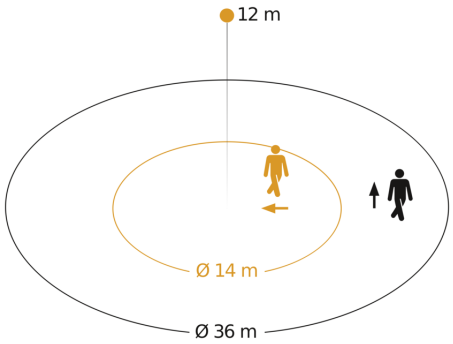


Possible mounting height: 4,00 m – 14,00 m
Orange: radial
Black: tangential

Dimension Drawing

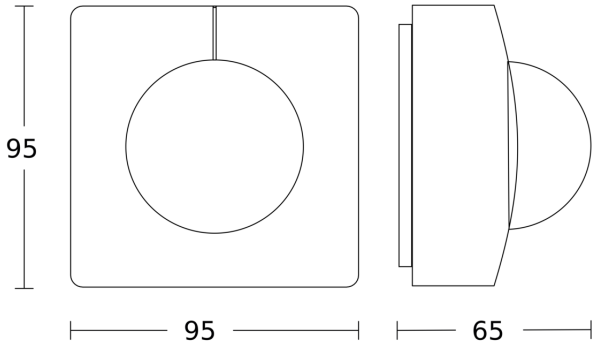

Master circuit diagram

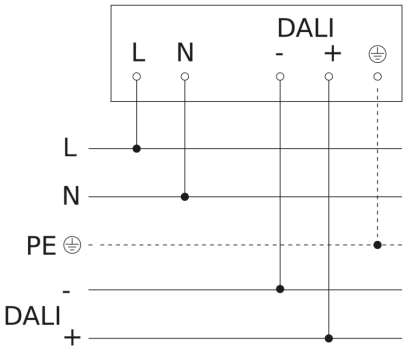

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

